




www.Masterfog.eu

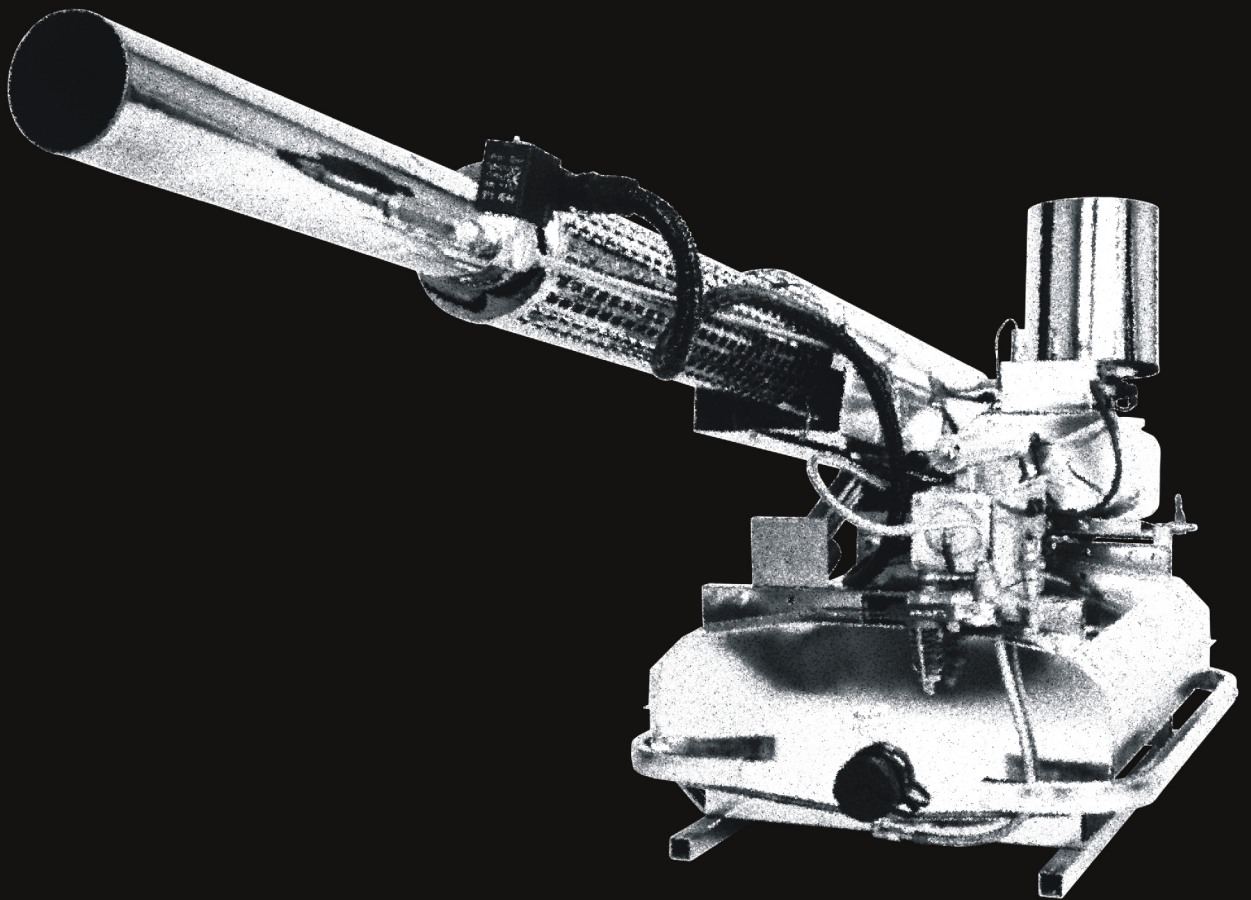

Masterfog thermal foggers are intended for disinfection and insect extermination at inventory premises: hen houses, pigsties, barns, external premises of farms (such as mosquito extermination), forage warehouses, greenhouses, mushroom farms and wherever application in the form of thermal mist generation is necessary, effective and economically

TS-35A

TECHNICAL PARAMETERS:

Weight: 7,9 kg

Dimensions: length 137 cm x width 27 cm x height 31 cm

Solution tank capacity: 6L

Fuel tank capacity: 2 L

Fuel consumption: 1,2-1,5 L/h

Maximum efficiency: 45 L/h

Power supply: Battery 4 x 1,5 V

Warranty: 24 months



TS-75L

TECHNICAL PARAMETERS:

Weight: 9,5 kg

Dimensions: length 135 cm x width 29 cm x height 36 cm

Solution tank capacity: 6L

Additional container for chemicals solution: 20L

Fuel tank capacity: 2 L

Fuel consumption: 1,2-1,5 L/h

Maximum efficiency: 80 L/h

Power supply: Battery 4 x 1,5 V

Warranty: 24 months



TS-95L

TECHNICAL PARAMETERS:

Weight: 44,5 kg
Dimensions: length 191 x width 95 x height 46 cm
Solution tank capacity: 60L
Fuel tank capacity: 5 L
Fuel consumption: 4 L/h
Maximum efficiency: 100 L/h
Power supply: Lithium battery 12 V
Warranty: 24 months



Electric Fogger ULV 2600 Masterfog

Technical parameters:

Weight: 3,2 kg (empty)
Dimensions (L x W x H): 42cm x 20cm x 29 cm
Tank capacity: 6L
Electrical motor: 800 W
Liquid flow rate: do 24l/h, adjustable
Particle size: 5-20 micron VMD, adjustable

We provide:

- continuous spare parts availability
- guarantee and post-guarantee maintenance and service
- replacement device during service



www.Masterfog.eu

www.DDD-1.pl

DDD-1
NAJLEPSZA DEZYNFEKCJA

Import - Distribution - Service

ul. Hałcnowska 19
43-300 Bielsko-Biała
33-821-34-21
biuro@ddd-1.pl
sprzedaz@ddd-1.pl